


STANDARD FOLDING PARKING BARRIER




ELECTRO-GALVANISED



FULLY HOT-DIPPED GALVANISED



HIGH VISIBILITY



SECURE LOCKING



SEAMLESS, STRONG WELD



Advantages +



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.




DURABLE MATERIAL
Made from Ø32 mm mild steel tube with galvanised surface treatment for everyday parking control.



HIGH VISIBILITY
Two red reflective strips improve visibility in low light and at night, reducing accident risk.




SECURE LOCKING
Supplied with a sturdy padlock and three keys to prevent unauthorised access.



COMPACT SIZE
427 mm high for clear visibility, folds flat when not in use and fits standard parking bays.



QUICK INSTALLATION
Simple fixing on asphalt or concrete with included M10 hot-dip galvanised expansion bolts.

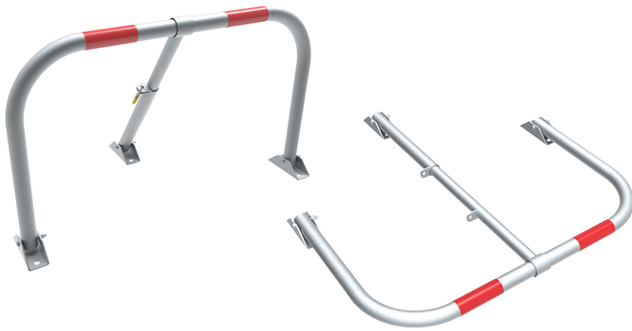

PRODUCTS	OVERALL DIMENSIONS	LOCKING SYSTEM	SURFACE TREATMENT	MOUNTING HARDWARE
	Length: 700 mm (27.6") Height: 427 mm (16.8") Tube diameter: Ø32 mm (1.26")	1 brass padlock with 3 keys	Electro-galvanised Fully hot-dipped galvanised (after welding)	M10 hot-dip galvanised expansion bolts

BEST SELLERS

