




SPEED HUMPS



3 CM SPEED HUMP



5 CM SPEED HUMP (600 MM WIDE)

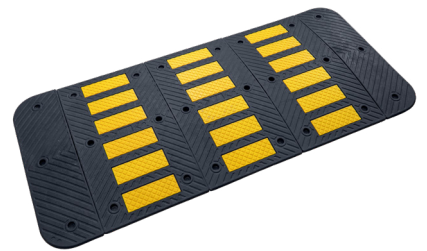

5 CM SPEED HUMP (900 MM WIDE)



7 CM SPEED HUMP (900 MM WIDE)



7 CM SPEED HUMP (1200 MM WIDE)



YELLOW MOULDED-IN COVER



INTERLOCKING SYSTEM



REACH CERTIFIED




Advantages +



YELLOW MOULDED-IN COVER

Built into the speed hump to stay bright with no peeling or fading. Yellow stays yellow.




PLASTIC-RUBBER COMPOSITE

Cost-effective, UV-resistant, and very sturdy.



INTERLOCKING SYSTEM

Male and female connectors to prevent movement and allow quick installation.




2-IN-1 PRODUCT

Built-in channels for cable protection.



HEAVY-DUTY HARDWARE

Premium-quality screws and plastic anchors – rust-proof and highly durable.

PRODUCTS	TYPES	OVERALL DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER	MOUNTING HARDWARE
	3 cm speed hump	Middle part: 500 x 600 x 30 mm (20" x 24" x 1.2") End cap: 250 x 600 x 30 mm (10" x 24" x 1.2")	/	
	5 cm speed hump (600 mm wide)	Middle part: 500 x 600 x 50 mm (20" x 24" x 2") End cap: 250 x 600 x 50 mm (10" x 24" x 2")	2 x Ø30 mm (Ø1.2")	Coach screw: M12 x 160 mm (M12 x 6") Anchor: Ø17 x 105 mm (Ø0.67" x 4.1") 
	5 cm speed hump (900 mm wide)	Middle part: 500 x 900 x 50 mm (20" x 35" x 2") End cap: 250 x 900 x 50 mm (10" x 35" x 2")	2 x Ø30 mm (Ø1.2")	
	7 cm speed hump (900 mm wide)	Middle part: 500 x 900 x 70 mm (20" x 35" x 2.8") End cap: 250 x 900 x 70 mm (10" x 35" x 2.8")	2 x Ø45 mm (Ø1.8")	
	7 cm speed hump (1200 mm wide)	Middle part: 500 x 1200 x 70 mm (20" x 47" x 2.8") End cap: 250 x 1200 x 70 mm (10" x 47" x 2.8")	2 x Ø45 mm (Ø1.8")	

BEST SELLERS



Headquarters: Hong Kong, China
Production & Operations Centre: Qingdao, China



contact@sinoconcept.com
<https://sinoconcept.com>